

STANDAR COVERAGE

Basic Sprinkler Quick Response Sprinkler Recessed Horizontal, Horizontal & Vertical



DESCRIPTION:

AG-66QR sprinklers described in this technical data sheet are quick response, standard coverage 3 mm glass bulb. These sprinklers are designed for use in commercial occupancies such as hotels, banks, shopping malls, and factories.

Thermosensitive glass bulb 3 mm is used. They have a capacity to react 6 times faster than standard response sprinklers. The bulb contains a special liquid hermetically sealed in a glass capsule.

TECHNICAL DATA:

Nominal "K" Factor	5,6 (80)
Thread Size	1/2" NPT (R1/2)
Nominal Orifice	1/2" (15 mm)
Temperatures	135°F (57°C) 155°F (68°C) 175°F (79°C) 200°F (93°C) 286°F (141°C) 360°F (182°C) 500°F (260°C)
Maximum / Minimum Working Pressure	175 psi (12,1 bar) / 7 psi (0,48 bar)
Factory tested Pressure	500 psi (34,5 bar)
Materials	Frame: Brass Deflector: CDA Alloy 260, 220 or 510 Screw: CDA Alloy 360 or 544 Cup: CDA Alloy 651 or 693 Washer: Nickel Alloy 440 or 360, coated with PTFE Adhesive Tape CDA 360 Bulb: Glass, mm
Finishes ⁽⁴⁾	Bronze Chrome Polyester

Data sheet:	16
REV:	00

OPERATION:

At normal temperatures, the glass bulb contains the fluid in both the liquid phase and the vapor phase. The vapor phase can be seen as a small bubble. As heat is applied, the liquid expands forcing the bubble smaller and smaller as the liquid pressure increases. Continued heating forces the liquid to push out against the bulb, causing it to shatter, opening the waterway and allowing the deflector to distribute the discharging water.

INSTALLATION:

Model AG-66QR sprinklers are quick response sprinklers intended for installation as specified in NFPA13. They must also be installed with the Model AG1 Sprinkler Wrench for the horizontal and vertical models or AG2 Sprinkler Wrench for the recessed sprinkler.

A leak tight ½" NPT (R1/2) sprinkler joint can be obtained with a torque of 8-18ft-lbs (10.8- 24.4N-m). Do not tighten sprinklers over maximum recommended torque. It may cause leakage or impairment of these sprinklers.

The sprinklers come with an orange protection, to avoid breakage during assembly. Remove this protection once installed and make sure that everything is correct. The AG Sprinkler Wrenches are designed to install sprinklers with the protection still.



TEMPERATURE RATING:

Classification	Sprinkler Temperature		Max. Ambient Temperature		Bulb Color
	°F	°C	°F	°C	
Ordinary	135	57	100	38	Orange
Ordinary	155	68	100	38	Red
Intermediate	175	79	150	66	Yellow
Intermediate	200	93	150	66	Green
High	286	141	225	107	Blue

Data sheet:	16
REV:	00



DIMENSIONS:

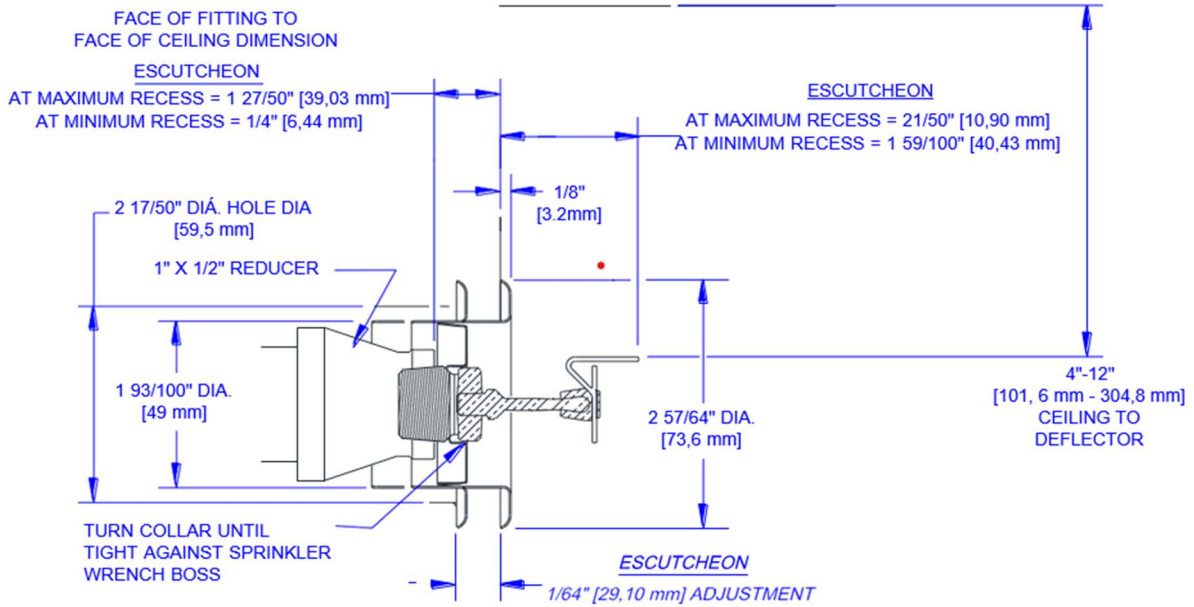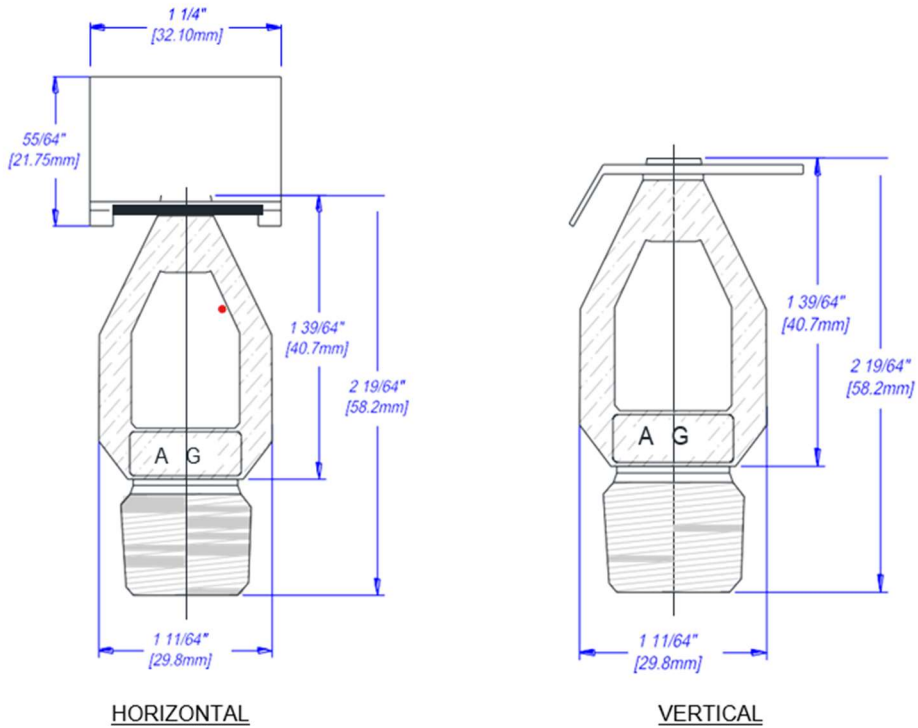

RECESSED HORIZONTAL WITH ESCUTCHEON

Data sheet:	16
REV:	00